

Total Marks: 100

SECTION A

- $$2 \times 10 = 20$$

- ## SECTION B

- $$10 \times 3 = 30$$

-


- $$G(s) = \frac{1}{s(1+s)(1+2s)}$$

- $$A = \begin{bmatrix} 0 & -1 \\ 2 & -3 \end{bmatrix}$$

$$10 \times 1 = 10$$

- QP23DP1 290 | 18-01-2023 13:29:29 | 117.55.242.132

- (b) Using block reduction technique calculate transfer function of the block diagram given below-

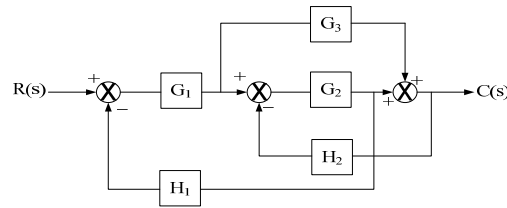

4. Attempt any one part of the following:

10 x 1 = 10

- (a) Derive the time response of a second order control system for unit step input.
 (b) The open loop transfer function of a unity feedback control system is given by.

$$G(s) = \frac{K}{s(Ts + 1)}$$

The system input is a unit step function. Determine-

- (i) By what factor amplifier gain K should be multiplied so that the damping ratio is increased from 0.3 to 0.9.
 (ii) By what factor the time constant T should be multiplied so that the damping ratio is reduced from 0.8 to 0.2.

5. Attempt any one part of the following:

10x1 = 10

- (a) Sketch the root locus plot and give the stability conditions for the system when open loop transfer function is given by

$$G(s)H(s) = \frac{K}{s(s+1)(s+2)(s+3)}$$

- (b) The open loop T.F. of certain unity feedback system is

$$G(s) = \frac{K(s+1)}{s(s-1)(s+6)}$$

- Determine
 (i) Range of K for stability (ii) Marginal value of K (iii) Location of roots for marginal stability

6. Attempt any one part of the following:

10x1 = 10

- (a) Define resonant peak (M_r) resonant frequency (ω_r) and derive the formula for them.
 (b) Draw the Bode plot for the open loop T.F.

$$G(s) = \frac{1000}{s(1+0.1s)(1+0.001s)}$$

and from the graph determine

- (i) Gain cross-over frequency (ii) Phase cross-over frequency (iii) Gain margin (iv) Phase margin (v) Stability of the system

7. Attempt any one part of the following:

10x1 = 10

- (a) What are the different types of compensators used in control system? Discuss lead compensator and derive the relation between maximum lead angle Φ_m and α .
 (b) Examine the controllability and observability of a system with

$$A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix}, \quad B = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix}, \quad C = [10 \quad 5 \quad 1]$$